




(Cylindrical) Watertight ceiling lamps

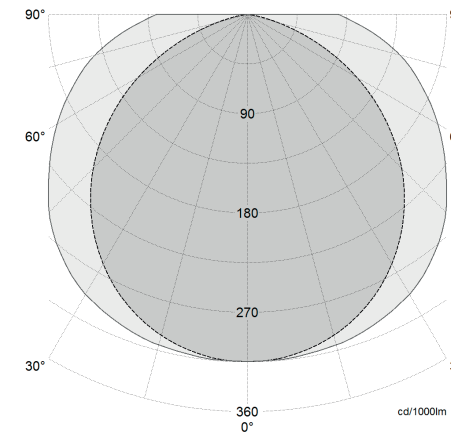

The polymethyl methacrylate product body offers excellent resistance to acids, diluted alkaline solutions, greases and oils.

The cylindrical body, in scratch-resistant PMMA (polymethyl methacrylate) or, on request, in borosilicate glass, dia. 70 mm, contains a LED or fluorescent lamp with two end caps. By tightening the three screws on the side caps, an O-ring is compressed and adheres perfectly to the inner wall of the cylinder. This closure guarantees

a watertight seal of the IP 67 type. Watertight ceiling lamps are particularly suitable for lighting up machine tool work areas, where well-layered linear lighting of both the spindle and the work area is required. The machine tool operator always has excellent lighting even in the presence of water jets and coolant emulsions. The TF Series of watertight ceiling lamps is also suitable for machines with strong vibrations. The TF Series watertight ceiling lamps are available in three different lengths. Operating temperature max. 60°C.

Code	Power	Color temperature	Lumen	Supply	tube Ø	Length	Body	IP Protection	IK Protection	Class	Cable	Fixing
Cylindrical LED PMMA												
LONG												
TLED40-24 TLED40-230	1 40 W TUBE WITH LED CIRCUITE	6500 K	6690 lm	24 V ca/ac 230 V	70 mm	1510 mm	CYLINDRICAL IN PMMA	IP67	IK07	III II	NONE	2 LOCKING BRACKETS
MEDIUM												
TLED18-24 TLED18-230*	1 18 W TUBE WITH LED CIRCUITE	6500 K	3060 lm	24 V ca/ac 230 V	70 mm	707 mm	CYLINDRICAL IN PMMA	IP67	IK07	III II	NONE	2 LOCKING BRACKETS
SHORT												
TLED12-24 TLED12-230	1 12 W TUBE WITH LED CIRCUITE	6500 K	2100 lm	24 V ca/ac 230 V	70 mm	505 mm	CYLINDRICAL IN PMMA	IP67	IK07	III II	NONE	2 LOCKING BRACKETS
Cylindrical LED glass												
LONG												
VTLED40-24 VTLED40-230	1 40 W TUBE WITH LED CIRCUITE	6500 K	6690 lm	24 V ca/ac 230 V	70 mm	1510 mm	CYLINDRICAL IN PYREX GLASS	IP67	IK07	III II	NONE	2 LOCKING BRACKETS
MEDIUM												
VTLED18-24 VTLED18-230*	1 18 W TUBE WITH LED CIRCUITE	6500 K	3060 lm	24 V ca/ac 230 V	70 mm	707 mm	CYLINDRICAL IN PYREX GLASS	IP67	IK07	III II	NONE	2 LOCKING BRACKETS
SHORT												
VTLED12-24 VTLED12-230	1 12 W TUBE WITH LED CIRCUITE	6500 K	2100 lm	24 V ca/ac 230 V	70 mm	505 mm	CYLINDRICAL IN PYREX GLASS	IP67	IK07	III II	NONE	2 LOCKING BRACKETS
Cylindrical fluorescent PMMA												
LONG												
TFTL36-24 TFTL36-230*	1 36 W FLUORESCENT TUBE	6500 K	3350 lm	24 V 2G13 230 V 2G13	70 mm	1510 mm	CYLINDRICAL IN PMMA	IP67	IK07	III I	NONE	2 LOCKING BRACKETS
MEDIUM												
TFC36-24 TFC36-230*	1 36 W COMPACT FLUORESCENT TUBE	6500 K	2900 lm	24 V 2G11 230 V 2G11	70 mm	707 mm	CYLINDRICAL IN PMMA	IP67	IK07	III I	NONE	2 LOCKING BRACKETS
SHORT												
TFC18-24 TFC18-230*	1 18 W COMPACT FLUORESCENT TUBE	6500 K	1200 lm	24 V 2G11 230 V 2G11	70 mm	512 mm	CYLINDRICAL IN PMMA	IP67	IK07	III I	NONE	2 LOCKING BRACKETS
Cylindrical fluorescent glass												
LONG												
VTFTL36-24 VTFTL36-230*	1 36 W FLUORESCENT TUBE	6500 K	3350 lm	24 V 2G13 230 V 2G13	70 mm	1510 mm	CYLINDRICAL IN PYREX GLASS	IP67	IK07	III I	NONE	2 LOCKING BRACKETS
MEDIUM												
VTFC36-24 VTFC36-230*	1 36 W COMPACT FLUORESCENT TUBE	6500 K	2900 lm	24 V 2G11 230 V 2G11	70 mm	707 mm	CYLINDRICAL IN PYREX GLASS	IP67	IK07	III I	NONE	2 LOCKING BRACKETS
SHORT												
VTFC18-24 VTFC18-230*	1 18 W COMPACT FLUORESCENT TUBE	6500 K	1200 lm	24 V 2G11 230 V 2G11	70 mm	512 mm	CYLINDRICAL IN PYREX GLASS	IP67	IK07	III I	NONE	2 LOCKING BRACKETS

*Available in 115V. To order substitute 230 with 115 in the code.