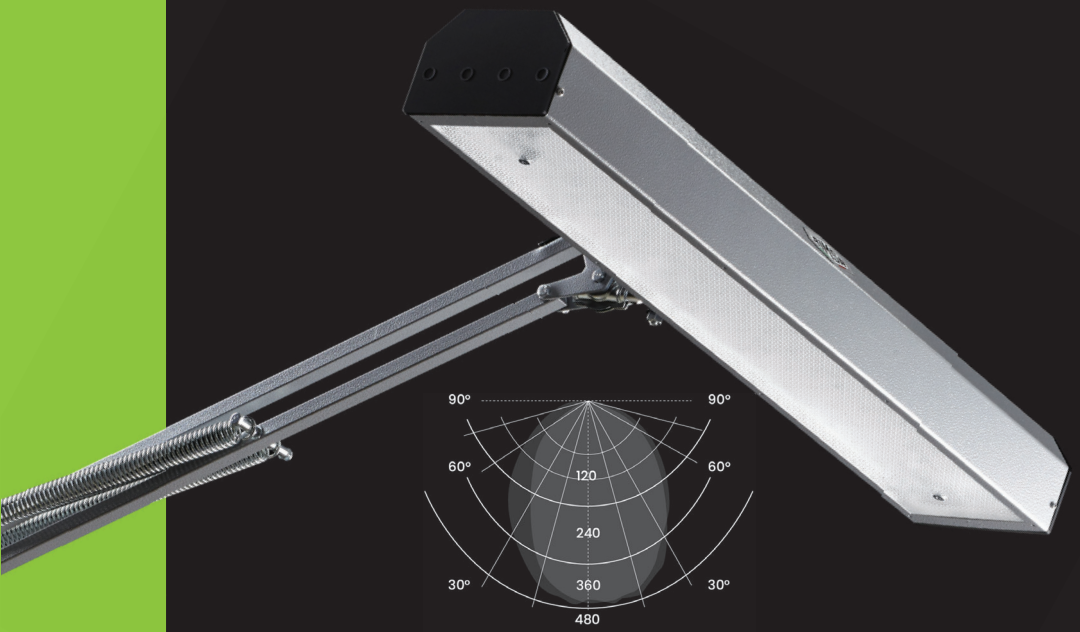

AUGMENTED REALITY

3D MODEL

The product is designed to provide light at 5.000 K and is therefore well suited for use in the goldsmithery field. Thanks to the large rectangular reflector, 160-LED can illuminate extensive working areas. The pantograph arm allows easy movement.

160-LED

ACCESSORIES

S11

S12

S15

RL

Power	13.7 W
Supply	110-240 V
Illuminance at 50 cm	1.800 lux
Colour Temperature	5.000 K
Light Intensity Adjustment (Dimmer)	5% - 100%
Reflector's diameter	495 x 95 mm
Diameter of the light field	800 x 650 mm
Product's life	50.000 hours
Structure	Pantograph
IP Protection	IP20
IK Protection	IK05
Cabling	Plug-top transformer with AWG 2x21; interchangeable plugs
Class	III
Fixing systems	S11, S12, S15, RL
Colours	Hammered Grey, Hammered White
Code	160-LED-GM, 160-LED-BM

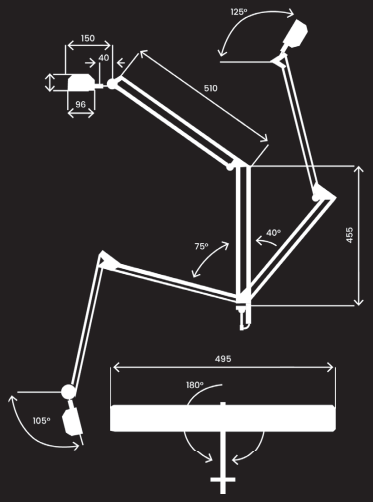

CODE

GM **160-LED-GM Hammered Grey**

BM **160-LED-BM Hammered White**

IP 20

5000

IK 05

Professional **Series**