CODE

GM **GOLD-LED-GM**
Hammered Grey

BM **GOLD-LED-BM**
Hammered White

The GOLD-LED model, thanks to its sturdy structure and because of its curved shape reflector, is well suited in goldsmithery and where precision is needed.

GOLD-LED

ACCESSORIES

S11

S12

S15



RL

Power	13.7 W
Supply	110-240 V
Illuminance at 50cm	1.800 lux
Light Intensity Adjustment (Dimmer)	5% - 100%
Colour Temperature	5.000 K
Reflector's length	400 mm
Diameter of the light field	700 x 650 mm
Product's life	50.000 hours
Colour rendering index (CRI)	94 Ra
Luminous flux	2.200 lm
Structure	Reflector + joints
IP Protection	IP20
IK Protection	IK05
Class	III
Cabling	Plug-top transformer with AWG 2X21; interchangeable plugs
Fixing systems	S11, S12, S15, RL
Colours	Hammered Grey, Hammered White
Code	GOLD-LED-GM, GOLD-LED-BM

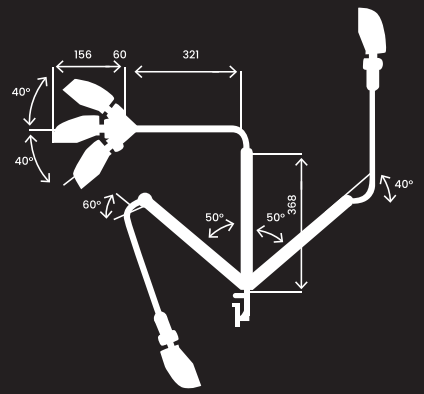



IK 05

IP 20

Diana **Series**