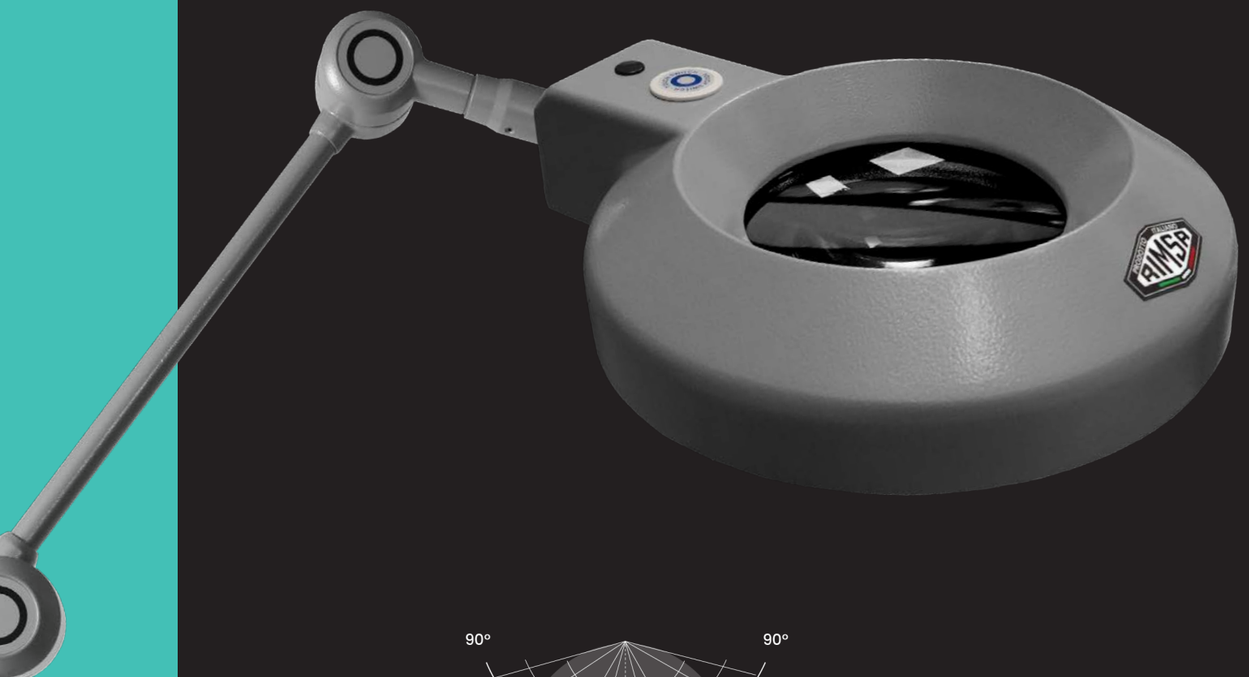

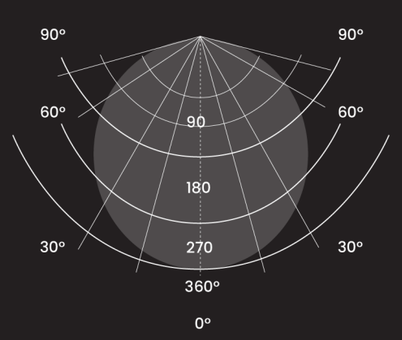

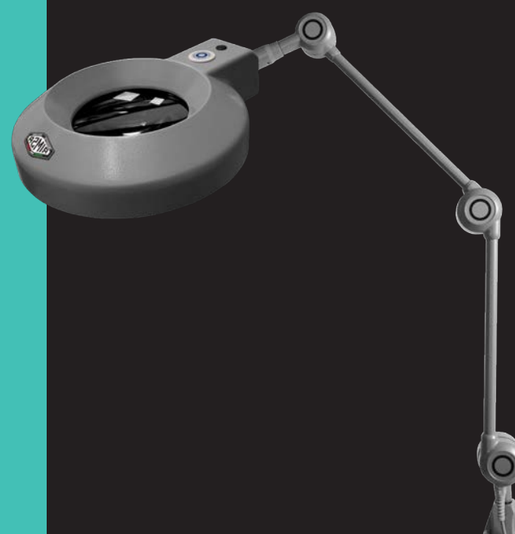

The special arm available on the L88-LED model allows for stability under strong vibrations. Because of its sturdiness, the product appears to be a very good companion in the industrial environment.

L88-**LED**

ACCESSORIES

S11

S12MED

S15

RL

Power	13.7 W
Supply	110-240 V
Illuminance at 50 cm	2.250 lux
Light Intensity Adjustment (Dimmer)	5-100 %
Dioptres - magnification power	3 - 1.75x
Colour Temperature	4.000 K
Reflector's diameter	230 mm
Diameter of the light field	700 mm
Product's life	50.000 hours
Colour rendering index (CRI)	94 Ra
Luminous flux	2200 lm
Structure	Reflector+ 3 Joints
IP Protection	IP20
IK Protection	IK03
Class	III
Cabling	Plug-top transformer with AWG 2X21; plug type C (European - 2 pins) - upon request type G (British - 3 pins)
Fixing systems	S11, S12MED, S15, RL
Colours	Hammered Grey, Hammered White
Code	L88-LED-GM, L88-LED-BM

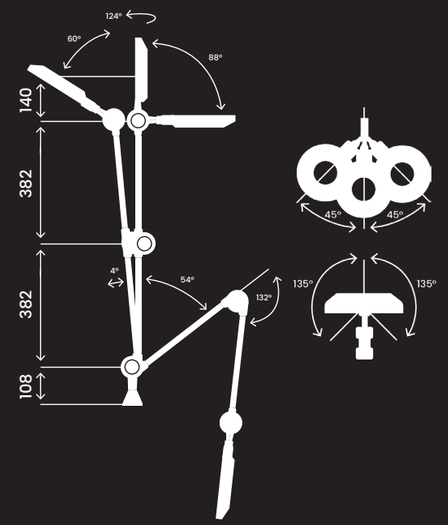

CODE

GM **L88-LED-GM Hammered Grey**

BM **L88-LED-BM Hammered White**

IK 03

IP 20

5000

Ciclope Series