

This model is purposely designed to be used on desks. Despite the limited extension of the pantograph arm, its stability is guaranteed by purposely engineered springs.

198-LED

ACCESSORIES




S11




S12



S15



RL




BASEPE



KITB24RL

Power	13.7 W
Supply	110-240 V
Illuminance at 50 cm	2.250 lux
Light intensity adjustment (Dimmer)	5-100 %
Dioptres - magnification power	3 - 1.75x
Colour temperature	4.000 K
Reflector's diameter	230 mm
Diameter of the light field	700 mm
Product's life	60.000 hours
Colour Rendering Index (CRI)	94 Ra
Luminous flux	2200 lm
Structure	Reflector + Pantograph arm with spring
IP Protection	IP20
IK Protection	IK03
Class	III
Cabling	Plug-top transformer with AWG 2X21; plug type C (European - 2 pins) - upon request type G (British - 3 pins)
Fixing systems	S11, S12, S15, Desk base (Basepe), RL
Colours	Hammered grey, Hammered white
Code	198-LED-GM, 198-LED-BM



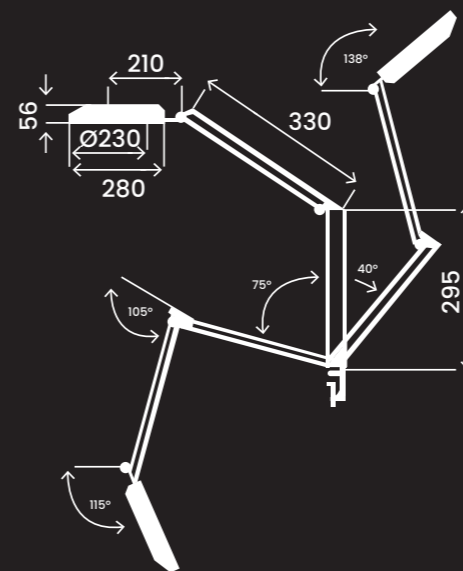


CODE

GM 198-LED-GM
Hammered grey

BM 198-LED-BM
Hammered white



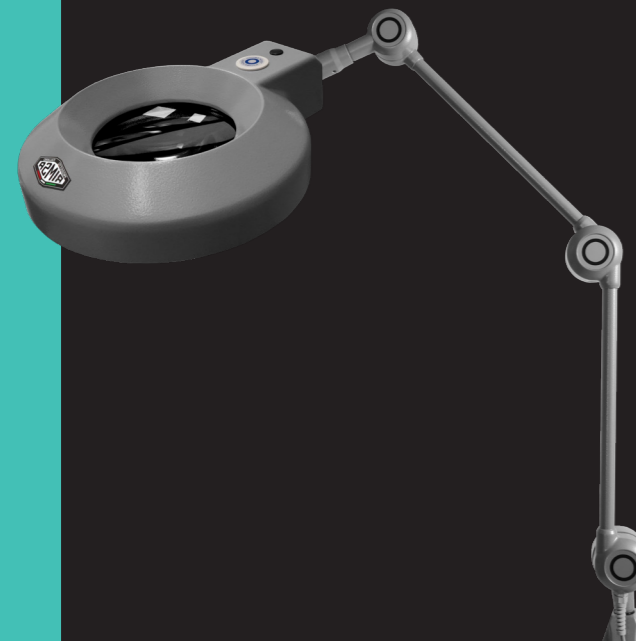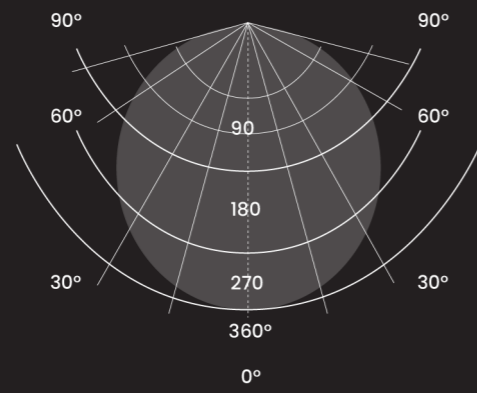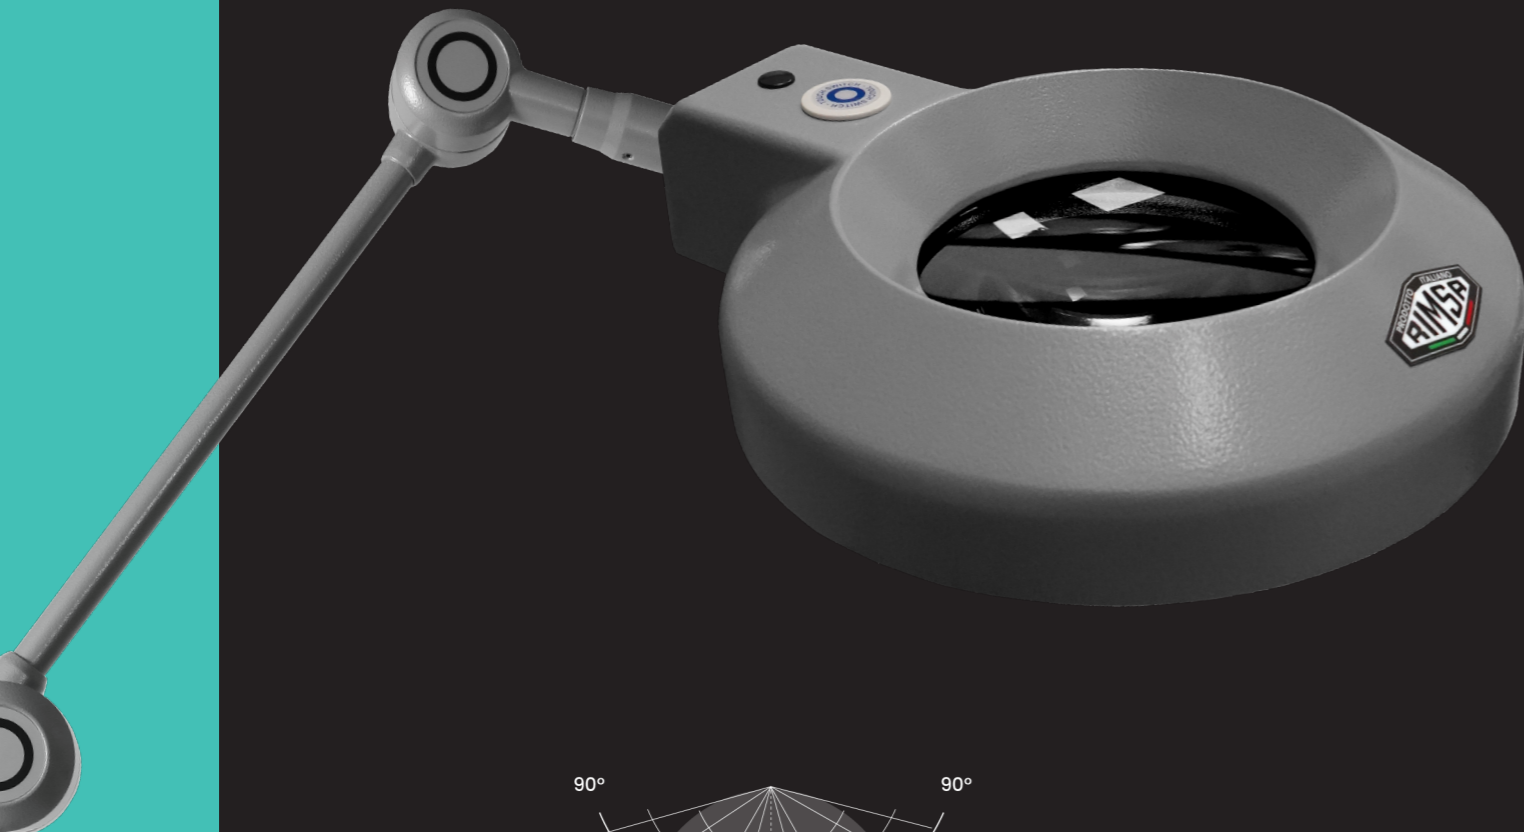


The special arm available on the L88-LED model allows for stability under strong vibrations. Because of its sturdiness, the product appears to be a very good companion in the industrial environment.

L88-LED

ACCESSORIES



Power	13.7 W
Supply	110-240 V
Illuminance at 50 cm	2.250 lux
Light intensity adjustment (Dimmer)	5-100 %
Dioptres - magnification power	3 - 1.75x
Colour temperature	4.000 K
Reflector's diameter	230 mm
Diameter of the light field	700 mm
Product's life	60.000 hours
Colour Rendering Index (CRI)	94 Ra
Luminous flux	2200 lm
Structure	Reflector+ 3 Joints
IP Protection	IP20
IK Protection	IK03
Class	III
Cabling	Plug-top transformer with AWG 2X21; plug type C (European - 2 pins) - upon request type G (British - 3 pins)
Fixing systems	S11, S12MED, S15, RL
Colours	Hammered grey, Hammered white
Code	L88-LED-GM, L88-LED-BM

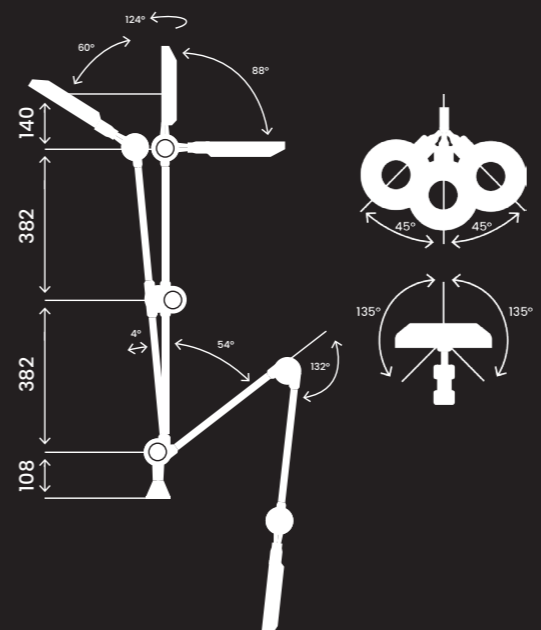

CODE

GM **L88-LED-GM**
Hammered grey

BM **L88-LED-BM**
Hammered white

