

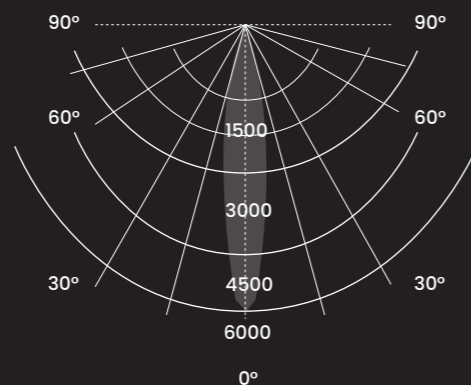


AUGMENTED REALITY



Compatible with iOS devices




This model is suitable for use on machine tools: the arm structure and its flexibility allow maximum freedom of movement.

050-LED

ACCESSORIES



S11*



RL*



AMG



C80



KITB24RL

* this accessory requires AMG adapter

	with transformer	low tension
Power	8 W	8 W
Supply	110-240 V	12-24 V ca/cc
Illuminance at 50 cm	30.000 Lux	30.000 Lux
Colour temperature	5.000 K	5.000 K
Reflector's diameter	90 mm	90 mm
Diameter of the light field	190 mm	190 mm
Product's life	60.000 hours	60.000 hours
Colour Rendering Index (CRI)	87 Ra	87 Ra
Luminous flux	550 lm	550 lm
Structure	Reflector + flexible arm + 1 Joint	Reflector + flexible arm + 1 Joint
IP protection	IP 66	IP 66
IK Protection	IK 05	IK 05
Class	III	III
Cabling	Plug-top transformer with AWG 2X21; plug type C (European - 2 pins) - upon request type G (British - 3 pins)	AWG 2X21
Fixing	4 screws	4 screws
Colour	Hammered grey	Hammered grey
Code	050-LED-TR	050-LED-BT

GM Hammered grey

CODE

LOW VOLTAGE:
050-LED-BT

WITH TRANSFORMER:
050-LED-TR

